
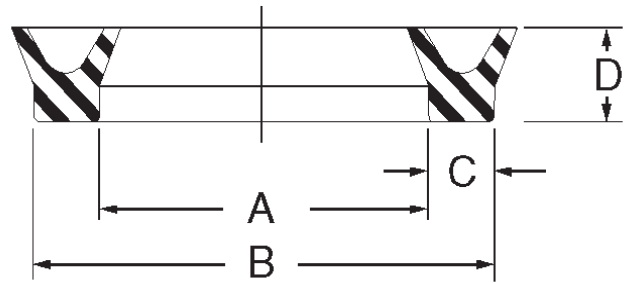


Buna U-Cups - Non-Standard

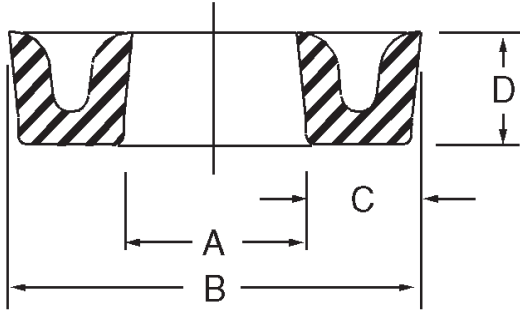

Non-standard Homogeneous U-Cups are made from 80 durometer nitrile and may come in one of several profiles. All may be used for rod or piston seals in pneumatic or low pressure hydraulic applications.

Temperature: -25F to 225F

Pressure: 0 to 2200 psi

Part Number	Inside Dia.	Outside Dia. B	Height D	Price
UCH06871000-218	11/16	1	9/32	\$ 4.00
UCH07501000-250	3/4	1	1/4	\$ 4.00
UCH13751875-250	1-3/8	1-7/8	1/4	\$ 4.51
UCH15001750-250	1-1/2	1-3/4	1/4	\$ 5.61
UCH22502750-312	2-1/4	2-3/4	5/16	\$ 6.23
UCH22503000	2-1/4	3	3/8	\$ 6.45
UCH30003500	3	3-1/2	1/4	\$ 7.85

Part Number	Inside Dia.	Outside Dia. B	Height D	Price
UCH32504000-312	3-1/4	4	5/16	\$ 16.18
UCH33123937	3-5/16	3-15/16	5/16	\$ 10.39
UCH43755000	4-3/8	5	5/16	\$ 11.46
UCH52506250-625	5-1/4	6-1/4	5/8	\$ 23.61
UCH60007000-500	6	7	1/2	\$ 24.48
UCH1512516000	15-1/8	16	7/16	\$ 71.47