



Accessories & Supplies

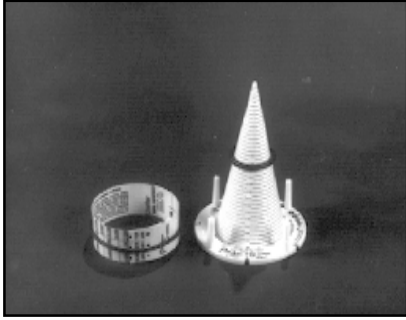

PARKER O-RING SIZING CONE AND TAPE

These two unique items make simple work of determining the correct O-ring number without measuring them. O-rings up to about 4 inches are measured on the cone, and up to 8 inches by the tape. Standard cross sections are easily determined by inserting the O-ring into notches in the base of the cone.

Part Number	Price
887-300	37.49 each

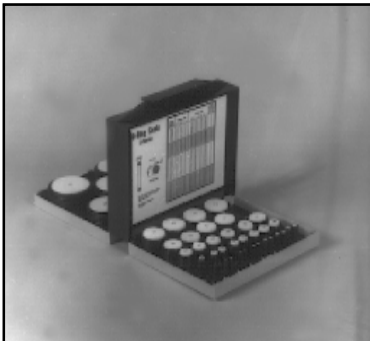

The **DELUXE MODULAR O-RING KIT** contains 485 O-rings of the 37 most popular sizes. Molded from high impact ABS plastic, this heavy duty design has reinforced hinges with metal hinge pins. O-rings are kept in place by ridges on the removable, numbered plugs. The internal locking system keeps them in place even when turned upside down. Actual and nominal O-ring sizes are listed on the large cross reference chart inside. This kit may be customized for different sizes and materials.


Part Number	Price
ORKIT485-N70 70 DURO BUNA	165.00 each
991604C 90 DURO BUNA	210.00 each
ORKIT485-V75BR 75 DURO BROWN VITON	465.00 each



O-RING SPLICING KITS

These kits contain 4 sizes of 70 durometer cord, razor blade, splicing jig, and bonding cement. Extra cord and cement may be ordered separately. See O-Ring section for replacement cord stock.

Part Number	Price
#100 Inch Kit	59.31 each
#104 Metric Kit	59.31 each
MC-120 Bonding Cement	8.53 each

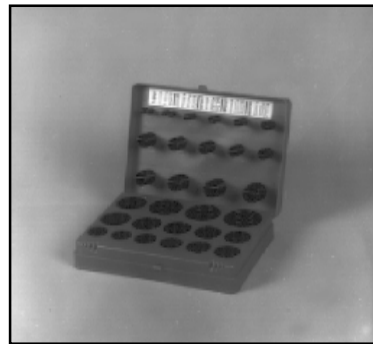

O Ring Kits

ORKIT380	27 sizes	380pcs	
N70			65.49
ORKIT382-N90	27 sizes	382pcs	
N90			99.88
ORKIT380-V75BR	27 sizes	382pcs	
V75BR			324.88
MORKIT500	30 sizes	500pcs	
N70			99.88
ORKIT212BOSSN90	20 sizes	212pcs	
N90			39.25



O-RING EXTRACTION TOOL SET

This kit consists of 2 double ended brass tools in a vinyl case.

Part Number	Price
887-200	17.38 each




PARKER SUPER O-LUBE

Parker Super O-Lube is a silicone based lubricant that can be used with virtually any rubber polymer. High pressure systems, as well as vacuum uses, are typical applications where Super O-Lube is beneficial. Temperature range is -65 degree F to +400 degree F.

Parker Super O-Lube will not clog 30 micron filters and is extremely moisture resistant.

Part Number	Price
884-2	30.62 each

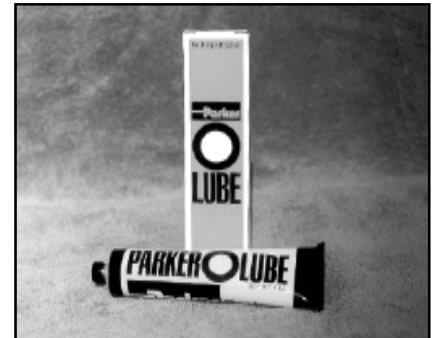


PARKER O-LUBE

Parker O-Lube is a barium base petroleum grease formulated to ease installation and prolong the service life of synthetic rubber O-rings and seals. It is well suited for compounds compatible with petroleum based fluids and a temperature range of -20 degree F to + 300 degree F.

DO NOT USE IN SYSTEMS WHERE PURE OXYGEN IS PRESENT - FIRE OR EXPLOSION MAY RESULT!

Part Number	Price
884-4	9.13 each


Accessories & Supplies

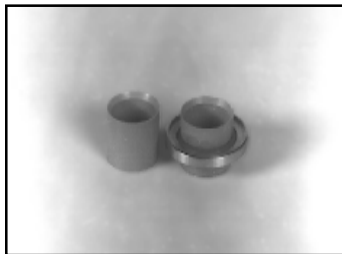

Oil Seal Installation Tool

This sleeve enables damage-free installation of teflon lip oil seals - particularly the Commerical M25^o motor and C101^o pump seals. This tool fits a 1-3/16" shaft. Contact sales office for other sizes.

PARTNUMBER	PRICE
OSIT-118	6.11

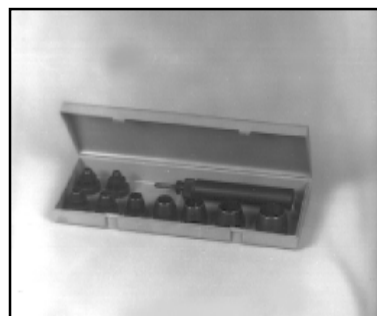

PUNCH SET (SELF CENTERING)


This heavy duty hardened steel punch set has a spring loaded centering device that enables accurate punching of piston cup holes and small gaskets.

Part Number	Price
K-156	107.50 each



This pure TFE joint sealant is supplied in continuous low density cord with double sided tape. Simply lay over surface to be sealed, overlap joint and tighten flanges to normal torque.

Part Number	Description	Price
EXPTFE125	1/8 X 100	185.75
EXPTFE187	3/16 X 75	185.75
EXPTFE250	1/4 X 50	185.75
EXPTFE375	3/8 X 50	289.00
EXPTFE500	1/2 X 30	289.00
EXPTFE625	5/8 X 30	425.00

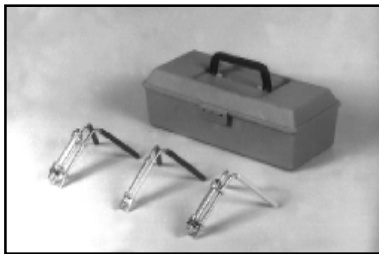

Rod seal installation tools make easy work of an otherwise tough job. Just simply fold seal with tool, insert in gland, and release tool. Saves seal and fingers from damage. American made in three sizes for your convenience.

IT-100	for 1" inside diameter and up.
IT-150	for 1-1/2" inside diameter and up.
IT-200	for 2" inside diameter and up.
IT-K	Buy all three and get a convenient plastic carrying case free.

PN	Price
IT-100	44.75
IT-150	44.75
IT-200	44.75
IT-K	134.25



Braided Packing


This general service packing is manufactured from a graphite lubricated non-asbestos material. It can be used at speeds to 1885 FPM and temperatures to +400 degrees. It can be used in both rotary and reciprocating applications in a PH range of 4-10.

Part Number	Cross Section	Price/Lb.
8005-125-1	1/8"	79.94
8005-187-1	3/16"	76.35
8005L-250-1	1/4"	59.54
8005L-312-1	5/16"	55.79
8005L-375-1	3/8"	43.25
8005L-437-1	7/16"	43.25
8005L-500-1	1/2"	43.25

Vegetable fiber sheet packing.

Top quality glue glycerine vegetable fiber sheet is good to 250 degrees.

Part Number	Thickness	Price/sq. yd
VEGFIB.006-36	.006	6.06
VEGFIB.010-36	.010	6.82
VEGFIB.015-36	1/64	7.05
VEGFIB.021-36	.021	8.96
VEGFIB.032-36	1/32	11.22
VEGFIB.062-36	1/16	23.65
VEGFIB.125-36	.125	54.43

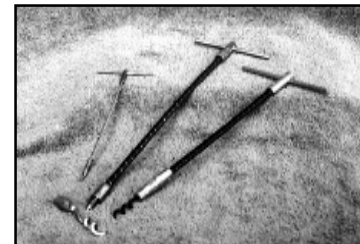

Screw Tip Packing Pullers

No shop or mechanic should be without these flexible packing pullers. Tips can be removed by unscrewing (except *) and are available in different configurations.


Part Number	Length	Tip Diameter	Price
F-00	6-1/2"	5/32"	27.62*
F-1	7-1/2"	1/4"	19.78
F-2	11"	5/16"	25.23
F-3	14"	3/8"	35.46
F-4	19"	1/2"	56.44*
F-5	23"	5/8"	64.28*
F-6	30"	5/8"	75.70*



TFE Tape

This industrial grade low density TFE tape can be used on pipe threads and is approved for oxygen service.

Part Number	Description	Price
500520TFETAPE	1/2" x 520"	1.45/roll

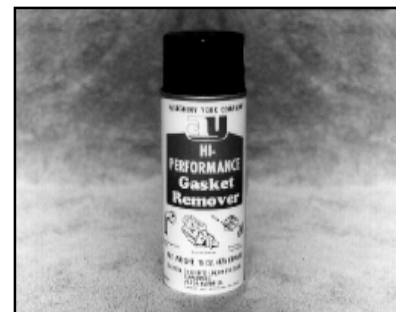

Hi-Performance Gasket Remover quickly dissolves gasket cement and makes removal of any type of gasket easy. Minutes after spraying, the gasket can be removed with a putty knife. It also works as a great paint remover.

Part Number	Price
23000001	18.68