
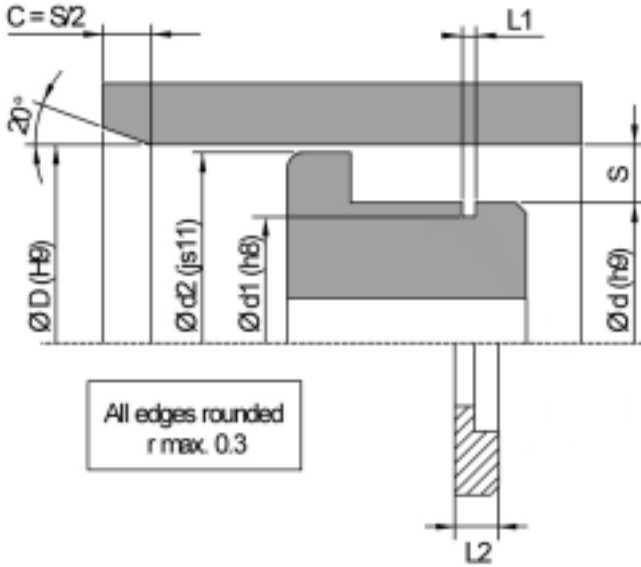


AR Retaining Rings



These plastic retaining rings are commonly used with the RSE piston u-cups found on page 54. Their primary use is to hold the seal from sliding off the piston during the return stroke. They allow for a piston to be designed with the steel to be removed from the end for easy installation of the piston seal.

Cushion Seals / Ret. Rings

Part Number	D	d	L1	L2	D 1	D 2	Price
AR 40 26	40	26	3.1	6	21.6	38.7	\$ 5.57
AR 45 35	45	35	2.6	5	30.6	44.1	\$ 5.57
AR 50 30	50	30	3.3	6.5	25.6	48.3	\$ 5.57
AR 50 40	50	40	2.6	5	35.6	48.7	\$ 5.77
AR 55 40	55	40	3.1	6	35.6	53.7	\$ 5.98
AR 60 40	60	40	3.1	6.5	35.6	58.3	\$ 5.98
AR 63 45	63	45	3.1	6	40.6	61.6	\$ 7.01
AR 65 45	65	45	3.3	6.5	40.6	63.1	\$ 7.22
AR 65 50	65	50	3.1	6	45.6	63.2	\$ 7.22
AR 70 50	70	50	3.1	6.5	45.6	68.3	\$ 7.63
AR 80 60	80	60	3.3	6.5	55.6	78.3	\$ 8.25
AR 80 65	80	65	3.1	6	60.6	78.6	\$ 8.25
AR 85 70	85	70	3.1	6	65.6	83.6	\$ 8.25
AR 90 70	90	70	3.3	6.5	65.6	88.3	\$ 8.25
AR 95 75	95	75	3.3	6.5	70.6	93.3	\$12.17
AR 100 80	100	80	3.3	6.5	75.6	98.3	\$12.17
AR 104.5 85	104.5	85	3.1	6	80.6	102.6	\$13.82
AR 104.5 85/1	104.5	85	3.3	6.5	80.6	103.3	\$13.82
AR 105 85	105	85	3.3	6.5	80.6	103.3	\$13.82
AR 110 90	110	90	3.3	6.5	85.6	108.3	\$13.82
AR 115 95	115	95	3.3	6.5	90.6	113.3	\$13.82
AR 120 100	120	100	3.3	6.5	95.6	118.3	\$13.82
AR 125 105	125	105	3.3	6.5	100.6	123.3	\$17.73
AR 130 110	130	110	3.3	6.5	100.6	128	\$17.73