


RSE Piston U-Cups with L-Shaped Backup Ring

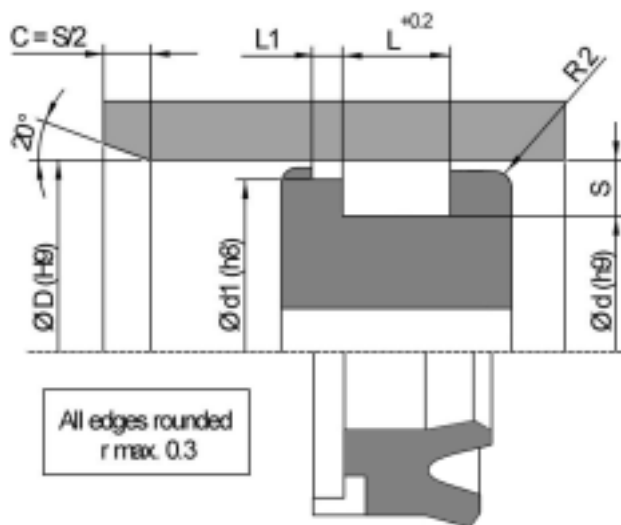

These urethane piston u-cups utilize an L-shaped anti-extrusion ring/bearing designed into the outside of the heel. These seals offer high elasticity and low deformation and abrasion resistance, along with superior anti-extrusion capabilities.

These are commonly used with plastic retainer rings, which hold the seal in it's groove. See the miscellaneous section for the retainers.

Temperature: -22F to 230F

Pressure: 0 to 5800 psi

Part Number	D	d	L	d1	L1	Price
RSE3220/W	32	20	10.0	28.5	6.4	\$ 8.48
RSE3522/W	35	22	10.0	31.4	6.4	\$ 9.23
RSE4025/W	40	25	10.0	35.4	6.4	\$ 10.48
RSE4026/W	40	26	9.5	35.4	6.4	\$ 10.48
RSE4030/W	40	30	13.3	35.4	6.4	\$ 10.98
RSE4530/W	45	30	10.0	40.4	6.4	\$ 11.98
RSE4535/W	45	35	9.5	40.4	6.4	\$ 11.98
RSE5030/W	50	30	14.5	44.3	6.4	\$ 12.48
RSE5035/W	50	35	11.0	45.4	6.4	\$ 12.48
RSE5040/W	50	40	11.0	45.4	6.4	\$ 11.98
RSE5540/W	55	40	11.0	50.4	6.4	\$ 12.73
RSE6040/W	60	40	14.5	55.4	6.4	\$ 13.23
RSE6040/W1	60	40	14.5	54.2	6.4	\$ 12.73
RSE6045/W	60	45	11.0	55.4	6.4	\$ 12.98

Part Number	D	d	L	d1	L1	Price
RSE6045/W1	60	45	11.0	54.2	6.4	\$ 12.48
RSE6345/W	63	45	11.0	58.4	6.4	\$ 12.98
RSE6550/W	65	50	11.0	60.4	6.4	\$ 13.48
RSE7050/W	70	50	14.5	64.2	6.4	\$ 14.97
RSE8060/W	80	60	13.0	74.2	6.4	\$ 15.97
RSE8060/W1	80	60	14.5	74.2	6.4	\$ 15.97
RSE9070/W	90	70	13.0	84.2	6.4	\$ 16.72
RSE9070/W1	90	70	14.5	84.2	6.4	\$ 16.72
RSE10080/W	100	80	14.5	93.2	6.4	\$ 17.97
RSE10080/W1	100	80	14.5	94.2	6.4	\$ 17.97
RSE11095/W	110	95	13.0	103.1	6.4	\$ 19.21
RSE11095/W1	110	95	13.0	104.1	6.4	\$ 19.21
RSE120100/W	120	100	14.5	113.1	6.4	\$ 21.21
RSE120100/W1	120	100	14.5	114.1	6.4	\$ 20.21

Extensive inventories at your disposal...