


U-R Wipers w/ Ribbed Heel - Inch

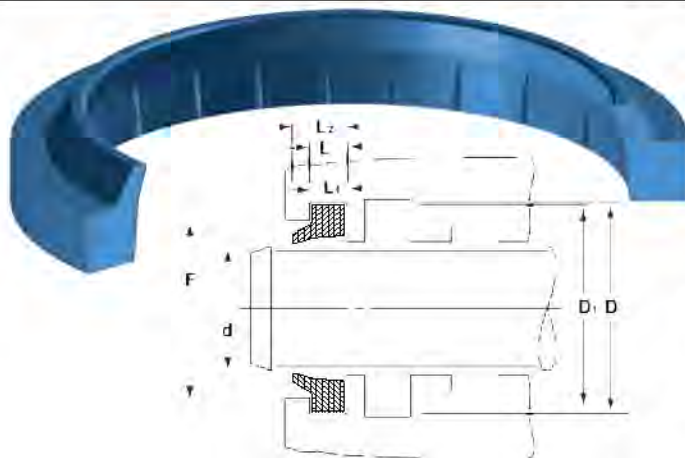

The ribbed heel snap-in rod wiper has been designed to fit "universal" type housings. The proportions of the wiping lip ensure that contact is maintained with the surface of the rod to remove heavily deposited mud, ice, etc. The outside of the wiper has snug contact with the inside of the housing and has a wiping lip to prevent contaminants from entering the groove. The molded ribs on the inside provide extra stability to the wiper and help prevent pressure trapping.

Temperature: -40°F to 230°F

EXAMPLE: U-1500R		
Prefix	Inside Diameter	Suffix
U-	1500	R
	1-1/2"	Ribbed Heel

ALTERNATIVE SEALS:
U-Wiper, B42, Wiper
Cord, S34

Part Number	Wiper Dimensions				Groove Dimensions		
	Rod Dia. d	Outside Dia. D ₁	Base Height L ₁	Total Seal Ht L ₂	+0.006 -0.000 D	+0.004 -0.000 L	+0.010 -0.000 F
U-0500R	0.500	0.750	0.124	0.210	0.747	0.125	0.660
U-0625R	0.625	0.875	0.124	0.210	0.872	0.125	0.785
U-0750R	0.750	1.125	0.187	0.305	1.122	0.187	0.995
U-0875R	0.875	1.250	0.187	0.305	1.247	0.187	1.120
U-1000R	1.000	1.375	0.187	0.305	1.372	0.187	1.245
U-1125R	1.125	1.500	0.187	0.305	1.497	0.187	1.370
U-1250R	1.250	1.625	0.187	0.305	1.622	0.187	1.495
U-1375R	1.375	1.750	0.187	0.305	1.747	0.187	1.620
U-1500R	1.500	1.875	0.187	0.305	1.872	0.187	1.745
U-1625R	1.625	2.000	0.187	0.305	1.997	0.187	1.870
U-1750R	1.750	2.125	0.187	0.305	2.122	0.187	1.995
U-2000R	2.000	2.500	0.249	0.395	2.497	0.250	2.327
U-2250R	2.250	2.750	0.249	0.395	2.747	0.250	2.577
U-2375R	2.375	2.875	0.249	0.395	2.872	0.250	2.702
U-2500R	2.500	3.000	0.249	0.395	2.997	0.250	2.827
U-2750R	2.750	3.250	0.249	0.395	3.247	0.250	3.077
U-3000R	3.000	3.500	0.249	0.395	3.497	0.250	3.327
U-3250R	3.250	3.750	0.249	0.395	3.747	0.250	3.577
U-3500R	3.500	4.000	0.249	0.395	3.997	0.250	3.827
U-3750R	3.750	4.250	0.249	0.395	4.247	0.250	4.077
U-4000-187R	4.000	4.375	0.187	0.275	4.372	0.187	4.245
U-4000R	4.000	4.500	0.249	0.395	4.497	0.250	4.327
U-4250R	4.250	4.750	0.249	0.395	4.747	0.250	4.577
U-4500R	4.500	5.250	0.374	0.585	5.247	0.375	4.993
U-4750-187R	4.750	5.125	0.187	0.275	5.122	0.187	4.996
U-4750R	4.750	5.500	0.374	0.585	5.497	0.375	5.243
U-5000-250R	5.000	5.500	0.249	0.395	5.497	0.250	5.327
U-5000R	5.000	5.750	0.374	0.585	5.747	0.375	5.493
U-5250R	5.250	6.000	0.374	0.585	5.997	0.375	5.743
U-5500-187R	5.500	5.875	0.187	0.275	5.872	0.187	5.745
U-5500R	5.500	6.250	0.374	0.585	6.247	0.375	5.993
U-6000-250R	6.000	6.500	0.250	0.375	6.497	0.250	6.332
U-6000R	6.000	6.750	0.374	0.585	6.747	0.375	6.493
U-6375-250R	6.375	6.875	0.249	0.375	6.872	0.250	6.702
U-6500R	6.500	7.250	0.374	0.585	7.247	0.375	6.993
U-7000-250R	7.000	7.500	0.250	0.375	7.497	0.250	7.332
U-7000R	7.000	7.750	0.374	0.585	7.747	0.375	7.493
U-7250-250R	7.250	7.750	0.249	0.375	7.747	0.250	7.577
U-8000R	8.000	8.750	0.374	0.585	8.747	0.375	8.493
U-8125-250R	8.125	8.625	0.250	0.375	8.622	0.250	8.452
U-8500R	8.500	9.250	0.374	0.585	9.247	0.375	8.993
U-8500R 361	8.500	9.250	0.374	0.585	9.247	0.375	8.993