


# AN Style Homogeneous Nitrile Vees - Inch

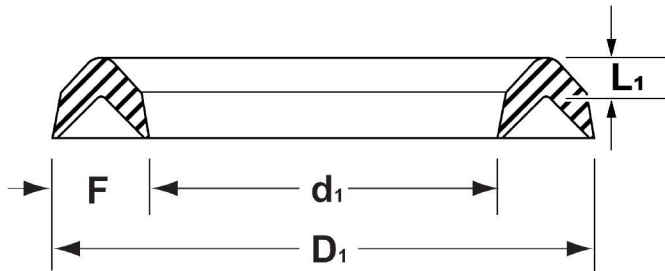

ALTERNATIVE SEALS: VP

EXAMPLE: 6225-20 N90		
Prefix	Inside Diameter	Material
6225-	20	N90
	1"	90A NBR

This short profile 90 durometer Nitrile vee is used in sets for pneumatic and hydraulic applications. Normally they are stacked together, or in conjunction with leather or PTFE vees of the same profile for hydraulic applications. This profile is also available in other compounds including FKM, EPR, and Leather. Consult sales office for price and availability.

AN # SYSTEM

Temperature: -40° to 225°F Pressure: Consult technical service

Part Number	Inside Dia. $d_1$	Outside Dia. $D_1$	Stack Height $L_1$
6225-1 N90	0.125	0.500	.083
6225-2 N90	0.187	0.562	.083
6225-3 N90	0.250	0.625	.083
6225-4 N90	0.312	0.687	.083
6225-5 N90	0.375	0.750	.083
6225-6 N90	0.437	0.812	.083
6225-7 N90	0.500	0.875	.083
6225-8 N90	0.250	0.750	.083
6225-9 N90	0.312	0.812	.083
6225-10 N90	0.375	0.875	.083
6225-11 N90	0.437	0.937	.083
6225-12 N90	0.500	1.000	.083
6225-13 N90	0.562	1.062	.083
6225-14 N90	0.625	1.125	.083
6225-15 N90	0.687	1.187	.083
6225-16 N90	0.750	1.250	.083
6225-17 N90	0.812	1.312	.083
6225-18 N90	0.875	1.375	.083
6225-19 N90	0.937	1.437	.083
6225-20 N90	1.000	1.500	.083
6225-21 N90	1.062	1.562	.083
6225-22 N90	1.125	1.625	.083
6225-23 N90	1.187	1.687	.083
6225-24 N90	1.250	1.750	.083
6225-25 N90	1.250	1.875	.140
6225-26 N90	1.375	2.000	.140
6225-27 N90	1.500	2.125	.140
6225-28 N90	1.625	2.250	.140
6225-29 N90	1.750	2.375	.140
6225-30 N90	1.875	2.500	.140
6225-31 N90	2.000	2.625	.140

Part Number	Inside Dia. $d_1$	Outside Dia. $D_1$	Stack Height $L_1$
6225-32 N90	2.125	2.750	.140
6225-33 N90	2.250	2.875	.140
6225-34 N90	2.375	3.000	.140
6225-35 N90	2.500	3.125	.140
6225-36 N90	2.500	3.250	.156
6225-37 N90	2.625	3.375	.156
6225-38 N90	2.750	3.500	.156
6225-40 N90	3.000	3.750	.156
6225-42 N90	3.250	4.000	.156
6225-44 N90	3.500	4.250	.156
6225-46 N90	3.750	4.500	.156
6225-47 N90	3.875	4.625	.156
6225-48 N90	3.875	4.750	.197
6225-49 N90	4.000	4.875	.197
6225-50 N90	4.250	5.125	.197
6225-51 N90	4.500	5.375	.197
6225-52 N90	4.750	5.625	.197
6225-53 N90	5.000	5.875	.197
6225-54 N90	5.250	6.125	.197
6225-55 N90	5.500	6.375	.197
6225-56 N90	5.500	6.500	.197
6225-57 N90	5.750	6.750	.197
6225-58 N90	6.000	7.000	.197
6225-60 N90	6.500	7.500	.197
6225-62 N90	7.000	8.000	.197
6225-63 N90	7.250	8.250	.197
6225-64 N90	7.500	8.500	.197
6225-66 N90	8.000	9.000	.197
6225-67 N80	8.500	9.500	.197
6225-70 N90	10.000	11.000	.197