


AN Style PTFE Vees - Inch

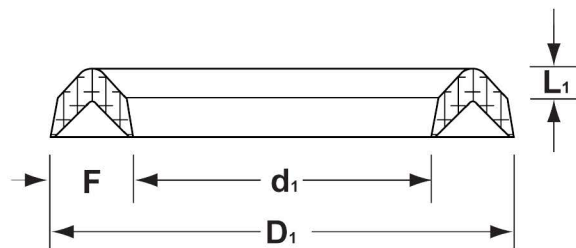

EXAMPLE: 6225-20 TFE		
Prefix	Inside Diameter	Material
6225-	20	PTFE
	1"	VIRGIN PTFE

This short profile PTFE Vee is used in sets for pneumatic and hydraulic applications. Normally they are stacked together, or in conjunction with Nitrile vees of the same profile. Please call sales office for price and availability.

Temperature: -100° to 400°F

Pressure: Consult technical service

AN # SYSTEM

Part Number	Inside Dia. d_1	Outside Dia. D_1	C/S F	Stack Height L_1	
6225-2 TFE	0.187	0.562	0.187	0.083	
6225-3 TFE	0.250	0.625	0.187	0.083	
6225-4 TFE	0.312	0.687	0.187	0.083	
6225-8 TFE	0.250	0.750	0.250	0.083	
6225-12 TFE	0.500	1.000	0.250	0.083	
6225-14 TFE	0.625	1.125	0.250	0.083	
6225-16 TFE	0.750	1.250	0.250	0.083	
6225-17 TFE	0.812	1.312	0.250	0.083	
6225-19 TFE	0.937	1.437	0.250	0.083	
6225-20 TFE	1.000	1.500	0.250	0.083	
6225-22 TFE	1.125	1.625	0.250	0.083	
6225-24 TFE	1.250	1.750	0.250	0.083	
6225-26 TFE	1.375	2.000	0.312	0.140	
6225-27 TFE	1.500	2.125	0.312	0.140	
6225-29 TFE	1.750	2.375	0.312	0.140	
6225-31 TFE	2.000	2.625	0.312	0.140	
6225-32 TFE	2.125	2.750	0.312	0.140	
6225-33 TFE	2.250	2.875	0.312	0.140	
6225-35 TFE	2.500	3.125	0.312	0.140	
6225-36 TFE	2.500	3.250	0.375	0.156	
6225-38 TFE	2.750	3.500	0.375	0.156	
6225-40 TFE	3.000	3.750	0.375	0.156	
6225-41 TFE	3.125	3.875	0.375	0.156	
6225-42 TFE	3.250	4.000	0.375	0.156	
6225-43 TFE	3.375	4.125	0.375	0.156	
6225-44 TFE	3.500	4.250	0.375	0.156	
6225-46 TFE	3.750	4.500	0.375	0.156	
6225-48 TFE	3.875	4.750	0.437	0.156	
6225-49 TFE	4.000	4.875	0.437	0.197	
6225-50 TFE	4.250	5.125	0.437	0.197	
6225-51 TFE	4.500	5.375	0.437	0.197	
6225-52 TFE	4.750	5.625	0.437	0.197	
6225-54 TFE	5.250	6.125	0.437	0.197	
6225-62 TFE	7.000	8.000	0.500	0.197	