

AS7 Series 2pc. BTFE Piston Seals - Metric, cont'd.


Part Number	Bore Dia. H 9 D	Groove Dia. f 8 d	Groove Height + .1 / - .0 L
AS742E-145MMB	145	124.0	8.1
AS742E-150MMB	150	129.0	8.1
AS742E-155MMB	155	134.0	8.1
AS740E-160MMB	160	144.5	6.3
AS742E-160MMB	160	139.0	8.1
AS742E-165MMB	165	144.0	8.1
AS742E-170MMB	170	149.0	8.1
AS740E-175MMB	175	159.5	6.3
AS742E-175MMB	175	154.0	8.1
AS740E-180MMB	180	164.5	6.3
AS742E-180MMB	180	159.0	8.1
AS742E-185MMB	185	164.0	8.1
AS742E-190MMB	190	169.0	8.1
AS742E-195MMB	195	174.0	8.1
AS740E-200MMB	200	184.5	6.3
AS742E-200MMB	200	179.0	8.1
AS742E-205MMB	205	184.0	8.1
AS742E-210MMB	210	189.0	8.1
AS742E-215MMB	215	194.0	8.1
AS742E-220MMB	220	199.0	8.1
AS742E-225MMB	225	204.0	8.1
AS742E-230MMB	230	209.0	8.1
AS742E-240MMB	240	219.0	8.1
AS742E-250MMB	250	229.0	8.1
AS742E-250MMHB	250	225.5	8.1
AS742E-260MMB	260	239.0	8.1
AS742E-270MMB	270	249.0	8.1

Part Number	Bore Dia. H 9 D	Groove Dia. f 8 d	Groove Height + .1 / - .0 L
AS742E-275MMB	275	254.0	8.1
AS742E-280MMB	280	259.0	8.1
AS742E-285MMB	285	264.0	8.1
AS742E-290MMB	290	269.0	8.1
AS742E-300MMB	300	279.0	8.1
AS742E-305MMB	305	284.0	8.1
AS742E-305MMHB	305	280.5	8.1
AS742E-310MMB	310	289.0	8.1
AS742E-320MMB	320	299.0	8.1
AS742E-320MMHB	320	295.5	8.1
AS742E-325MMB	325	304.0	8.1
AS742E-330MMHB	330	305.5	8.1
AS742E-340MMHB	340	315.5	8.1
AS742E-350MMHB	350	325.5	8.1
AS744E-350MMP	350	322.0	9.5
AS742E-360MMHB	360	335.5	8.1
AS742E-370MMHB	370	345.5	8.1
AS742E-380MMHB	380	355.5	8.1
AS742E-400MMHB	400	375.5	8.1
AS742E-450MMP	450	429.0	8.1
AS742E-480MMH	480	455.5	8.1
AS742E-480MMHB	480	455.5	8.1
AS742E-500MMHB	500	475.5	8.1
AS742E-530MMHB	530	505.5	8.1
AS744E-530MMB	530	502.0	9.5
AS742E-550MMH	550	525.5	8.1

TSP Series 2pc. BTFE Piston Seals - Metric



Please see Piston Seal Measurement Guide on Page 32.

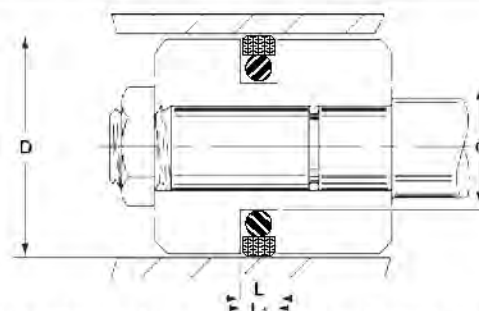

Part Number	Bore Dia. H9 D	Groove Dia. f8 d	Groove Height +0.1 / -0 L
TSP-50X39X5.2G	50	39	5.2
TSP-55X45X4.2G	55	45	4.2
TSP-60X47X5C	60	47	5.0
TSP-60X49X5	60	49	5.0
TSP-60X47X6.3	60	47	6.3
TSP-63X48X7.5	63	48	7.5
TSP-65X50X7.5	65	50	7.5
TSP-70X55X7.5	70	55	7.5
TSP-75X61.8X6.3	75	61.8	6.3
TSP-75X60X7.5	75	60	7.5
TSP-80X65X7.5	80	65	7.5
TSP-90X75X7.5	90	75	7.5
TSP-90X78X6	90	78	6.0
TSP-100X85X7.5	100	85	7.5
TSP-160X144X7.5	160	144	7.5
TSP-224X202X11	224	202	11.0

Our TSP series piston seals are machined from bronze filled PTFE for the most severe applications and are most commonly found on Japanese equipment. Standard expander rings on this series piston seal are round or square cross section, high memory 70 durometer nitrile; however, FKM expanders are available. Consult sales for pricing and delivery of special compounds.

Temperature: -40° to 225°F Pressure: 0 to 5,000 PSI

Standard Material: 40% Bronze-filled PTFE / Nitrile

"G" Suffix = Glass filled PTFE "C" Suffix = Carbon filled PTFE

EXAMPLE: TSP-50X39X5.2G					Suffix
Prefix	Bore Dia.	Groove Dia.	Groove Ht.		
TSP	- 50	x 39	x 5.2		G
	50mm	39mm	5.2mm		Glass filled PTFE